

# VIRO

R I D E S <sup>TM</sup>

## VEGA <sup>TM</sup>

### Replacing the Kickstand

**IMPORTANT:** An ADULT must make all repairs. Thoroughly inspect all parts after making modifications. DO NOT RIDE until you are sure the proper repairs have been made and the unit is assembled according to the manufacturer's specifications. If you are unsure of any repairs, contact consumer service.

#### SCOOTER KICKSTAND




Use an Allen wrench to remove the two screws on the kickstand. Then, remove the kickstand. **TIP:** Lay the scooter on its side before removing the kickstand, or ask an adult to hold the unit upright.



Replace the kickstand and use an Allen wrench to tighten the screws until it is secure.

#### BIKE KICKSTAND

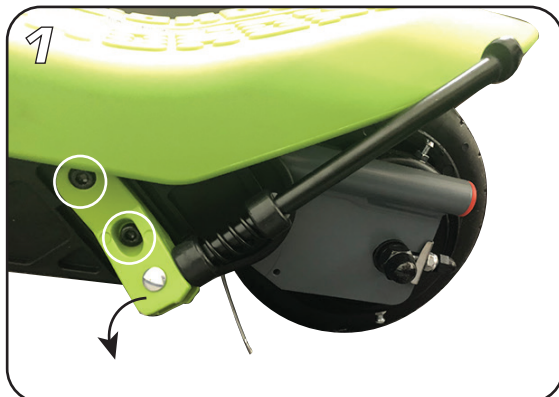

Use an Allen wrench to remove the two screws on the kickstand. Then, remove the kickstand. **TIP:** Lay the bike on its side before removing the kickstand, or ask an adult to hold the unit upright.



Replace the kickstand and use an Allen wrench to tighten the screws until it is secure.

[WWW.VIROPIDES.COM](http://WWW.VIROPIDES.COM)

Little Tikes Consumer Service || 2180 Barlow Road Hudson, Ohio 44236 U.S.A. || 1-800-321-0183